


RIVINOX™

An all stainless-steel blind rivet ideal for applications requiring good corrosion resistance. It also provides a large blind head to increase the bearing area, which is excellent for thin sheet materials. Unlike conventional blind rivets, RIVINOX™ have positively retained stems that remain intact after installation.



STAINLESS STEEL/STAINLESS STEEL - DOME HEAD

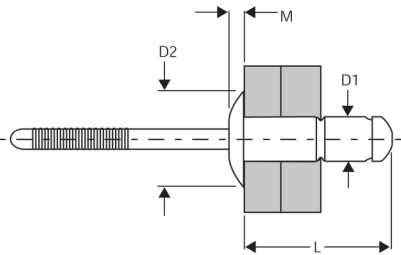

All dimensions are in millimeters, Strength values are in kg-f

Part No.	Rivet Ø	Hole Ø	Grip Range	D1 Max	L Max	D2 Max	M Max	Shear strength	Tensile strength
RVX408	3.2 (1/8")	3.3-3.4	1.0-3.0	3.3	8.9	6.8	1.1	163 kg-f (1598 N)	203 kg-f (1991 N)
RVX411			3.0-5.0		11.4			173 kg-f (1697 N)	
RVX414			5.0-7.0		13.6			326 kg-f (3197 N)	
RVX509	4.0 (5/32")	4.1-4.3	1.0-3.0	4.1	10.1	8.0	1.5	530 kg-f (5196 N)	407 kg-f (3991 N)
RVX512			3.0-5.0		12.5			530 kg-f (5196 N)	
RVX516			5.0-7.0		15.1			530 kg-f (5196 N)	
RVX611	4.8 (3/16")	4.9-5.1	1.5-3.5	4.9	12.9	9.6	2.0	560 kg-f (5492 N)	510 kg-f (5001 N)
RVX614			3.5-6.0		15.5			560 kg-f (5492 N)	
RVX618			6.0-8.5		18.5			560 kg-f (5492 N)	

BODY MATERIAL	Austenitic Stainless steel
MANDREL MATERIAL	Austenitic Stainless steel