


TOP-EX™

Suitable for use where controlled, light clamp is required, TOP-EX™ are ideal for rapid assembly of various materials including steel, aluminium, plastics & wood. Utilising a magazine-fed installation system, The TOP-EX™ system ensures consistent clamp and grip whilst providing a significant increase in production speed.

STEEL - DOME HEAD

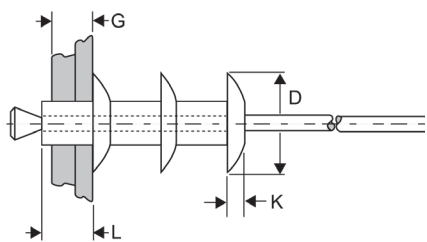

All dimensions are in millimeters. Strength values are in Newtons (N)

Part No.	Rivet Ø	Hole Ø	Grip Range	D (max)	k (max)	L	Qty/Pod
TE404DS	3.2	3.28-3.34	0.00-1.50	5.5	1.2	3.2	
TE406DS			1.60-3.10			4.0	
TE408DS			3.20-4.70			4.8	
TE410DS			4.80-6.30			6.4	
TE412DS			6.40-7.90			7.9	
TE413DS			8.00-9.50			9.5	
TE506DS	4.0	4.09-4.16	1.60-3.10	6.5	1.5	4.8	
TE508DS			3.20-4.70			6.4	
TE510DS			4.80-6.30			7.9	
TE512DS			6.40-7.90			9.5	
TE514DS			8.00-9.50			11.1	
TE607DS	4.8	4.85-4.93	1.60-3.10	8.9	1.8	5.6	
TE609DS			3.20-4.70			7.2	
TE611DS			4.80-6.30			8.8	
TE613DS			6.40-7.90			10.0	
TE615DS			8.00-9.50			12.0	