


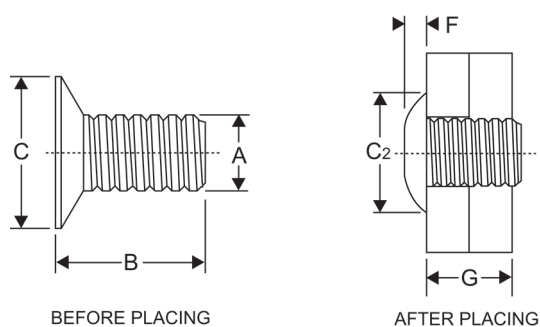

All dimensions are in millimeters. Strength values are in Newtons (N)

Part No.	Rivet Ø	Hole Ø		Grip Range	A (max)	B (max)	C		C2 max	F max	G max
		Front	Rear				Front	Rear			
TS3006S	3.0	3.1-3.2	2.3-2.9	2.9	2.8	5.2	5.4	5.9	6.2	1.4	4.0
TS3007S				3.9		6.1					5.0
TS3009S				4.8		7.1					6.0
TS3010S				5.8		8.1					7.0
TS3011S				6.8		9.1					8.0
TS3012S				7.8		10.1					9.0
TS3016S				10.7		13.1					11.0
TS3506S	3.5	3.5-3.6	3.1-3.2	2.9	3.1	5.2	5.6	6.0	6.2	1.4	4.0
TS3507S				3.9		6.1					5.0
TS3509S				4.8		7.1					6.0
TS3510S				5.9		8.1					7.0
TS3511S				6.8		9.1					8.0
TS3512S				7.8		10.1					9.0
TS3517S				11.8		14.1					11.0

NOTE: Rear sheet should have a minimum thickness of 1.62 mm

STRENGTH VALUES

Diameter Ø	Torque to unscrew	Tension	Shear
3.0	0.3 Nm	800 N (82 kg-f)	900 N (92 kg-f)
3.5	0.6 Nm	1000 N (102 kg-f)	1000 N (102 kg-f)