


SDL™ LOCKBOLT PINS




Vibration-resistant SDL™ fasteners install with consistency and control. They resist loosening due to vibration and provide a high uniform clamp force. This is an excellent fastener for a wide range of structural applications. With a simple and fast installation process, the SDL™ fastener holds the joints tight, everytime. Available in steel, stainless steel, and aluminium material ranging from 3/16" to 3/8" diameters.


STEEL, ALUMINUM & STAINLESS STEEL - (3/16" AND 1/4" DIAMETER)

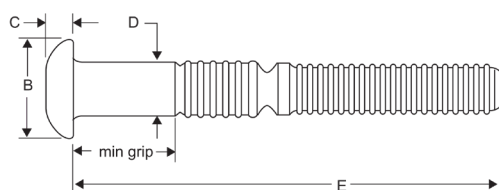

ROUND HEAD



TRUSS HEAD



COUNTERSUNK HEAD

All dimensions are in millimeters

Part No.	Diameter Ref.	D	Round Head		Truss Head		Csk. Head	
			B	C	B	C	B	C
SDL [][]-06 []	(3/16")	4.8-4.9	9.0-10.0	2.9-3.2	10.0-11.9	2.0-2.2	8.3-9.0	1.9-2.2
SDL [][]-08 []	(1/4")	6.4-6.6	12.1-13.3	3.5-3.9	13.5-15.1	2.6-2.9	11.1-12.0	2.6-2.9

SELECT GRIP NUMBER (SEE TABLE BELOW)

SELECT MATERIAL: S = STEEL, A = ALUMINIUM, U = STAINLESS STEEL

SELECT HEAD STYLE: R = ROUND; T = TRUSS; C = 90° COUNTERSUNK

MATERIAL	Steel	Aluminium	StainlessSteel
FINISH	Zinc Plated (G)	Natural	Natural

GRIP DATA AND DIMENSIONS

Part No.	Grip range	E (Length)	
		06 (3/16")	08 (1/4")
02	1.57-4.75	34.93	38.10
04	4.75-7.92	38.10	41.30
05	6.35-9.53	39.70	42.90
06	7.92-11.10	41.30	44.50
08	11.10-14.27	44.50	47.60
10	14.27-17.45	47.62	50.80
12	17.45-20.62	50.80	53.98
14	20.62-23.80	53.98	57.15
16	23.82-26.97	57.15	60.30

Part No.	Grip range	E (Length)	
		06 (3/16")	08 (1/4")
18	26.97-30.15	60.30	63.50
20	30.16-33.34	63.50	66.70
22	33.34-36.51	66.70	69.85
24	36.51-39.69	69.85	73.02
26	39.69-42.86	73.02	76.20
28	42.86-46.06	76.20	79.40
30	46.04-49.21	79.40	82.55
32	49.21-52.39	82.55	85.73

ORDERING EXAMPLE

SDLR5-0804G = Round Head, 1/4" diameter with grip range of 4.75-7.92 mm, Steel, Zinc Plated