


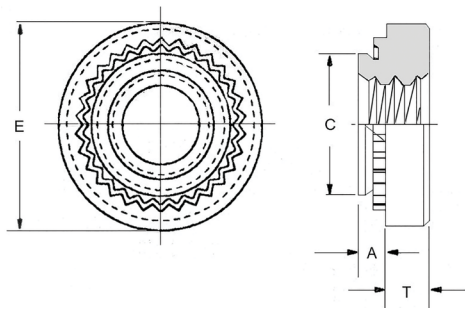

All dimensions are in millimeters

Part No.	Thread Size x Pitch+0.1	Thread Code	Shank Code	A (Shank) Max	Min. Sheet Thickness	Hole Ø In Sheet +0.08	C Max	E ±0.25	T ±0.25	Min. Dist. Hole C/L to Edge
CN [] M2-[]	M2 x0.40	M2	0	0.77	0.8-1	4.25	4.22	6.30	1.5	4.8
			1	0.97	1					
			2	1.38	1.4					
CN [] M2.5-[]	M2.5 x0.45	M2.5	0	0.77	0.8-1	4.25	4.22	6.30	1.5	4.8
			1	0.97	1					
			2	1.38	1.4					
CN [] M3-[]	M3 x0.50	M3	0	0.77	0.8-1	4.25	4.22	6.30	1.5	4.8
			1	0.97	1					
			2	1.38	1.4					
CN [] M3.5-[]	M3.5 x0.60	M3.5	0	0.77	0.8-1	4.75	4.73	7.10	1.5	5.6
			1	0.97	1					
			2	1.38	1.4					
CN [] M4-[]	M4 x0.70	M4	0	0.77	0.8-1	5.40	5.38	7.90	2.0	6.9
			1	0.97	1					
			2	1.38	1.4					
CN [] M5-[]	M5 x0.80	M5	0	0.77	0.8-1	6.40	6.38	8.70	2.0	7.1
			1	0.97	1					
			2	1.38	1.4					
CN [] M6-[]	M6 x0.10	M6	00	0.89	0.92	8.75	8.72	11.05	4.08	8.6
			0	1.15	1.2					
			1	1.38	1.4					
			2	2.21	2.3					
CN [] M8-[]	M8 x 1.25	M2	1	1.38	1.4	10.50	10.47	12.65	5.47	9.7
			2	2.21	2.3					
CN [] M10-[]	M10 x 1.50	M10*	1	2.21	2.31	14.00	13.97	17.35	7.48	13.5
			2	3.05	3.18					

SELECT SHANK CODE FROM TABLE

SELECT MATERIAL: S = STEEL, U = STAINLESS STEEL

	CODE S	CODE U
MATERIAL	Heat treated carbon steel	Stainless Steel 302/303
FINISH	Zinc ASTMB B 633-85 SCI	Passivated and/or tested ASTM A380