


FOR STAINLESS STEEL

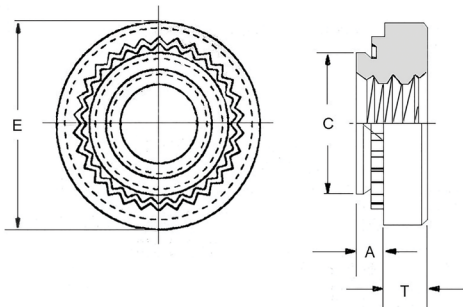

All dimensions are in millimeters

Part No.	Thread Size x Pitch+0.1	Thread Code	Shank Code	A (Shank) Max	Min. Sheet Thickness	Hole Ø In Sheet +0.08	C Max	E ±0.25	T ±0.25	Min. Dist. Hole C/L to Edge
CNUSPM3-[]	M3 x 0.50	M3	0	0.77	0.8-1	4.25	4.22	6.3	1.5	4.8
			1	0.97	1.01-1.39					
			2	1.38	1.4 Min					
CNUSPM4-[]	M4 x 0.70	M4	0	0.77	0.8-1	5.40	5.38	7.9	2.0	6.9
			1	0.97	1.01-1.39					
			2	1.38	1.4 Min					
CNUSPM5-[]	M5 x 0.80	M5	0	0.77	0.8-1	6.40	6.38	8.7	2.0	7.1
			1	0.97	1.01-1.39					
			2	1.38	1.4 Min					
CNUSPM6-[]	M6 x 1.00	M6	1	1.38	1.4 Min	8.75	8.72	11.1	4.1	8.6

SELECT SHANK CODE FROM TABLE
SELECT MATERIAL:
S = STEEL
U = STAINLESS STEEL

	CODE S	CODE U
MATERIAL	Heat treated carbon steel	Stainless Steel 302/303
FINISH	Zinc ASTMB B 633-85 SCI	Passivated and/or tested ASTM A380