


MAXI-GRIP™ LOCKBOLT PINS




Available in steel and aluminium materials, MAXI-GRIP™ fasteners are a cost-effective solution when working with materials with varying thicknesses. The MAXI-GRIP™ design reduces inventory part numbers and ensures lower installer and rework costs with a clean, uniform installation process. The typical grip range of a 1/4" MAXI-GRIP™ is 1.6mm–16mm and is suitable for a wide variety of applications such as truck & trailer bodies, electrical cabinets and bus bodies.

STEEL - BRAZIER HEAD

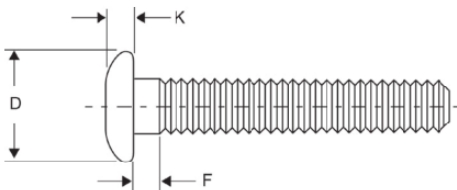


All dimensions are in millimeters. Strength values are typical.

Part No.	Lockbolt Ø	Hole Ø	Grip Range	D	K	F	Shear strength	Tensile strength
MXGB-0610S MXGB-0620S	4.8 (3/16")	5.1	1.6–15.9 7.9–31.7	10.0	3.4	2.3 8.4	775	744
MXGB-0810S MXGB-0820S	6.4 (1/4")	6.7	1.6–15.9 7.9–31.7	13.3	4.1	2.2 9.1	1366	1356




Matching Collars	Ø Ref.	A	B	C	D	E
MXGC-R6G	3/16"	7.85–7.92	4.84–4.91	6.86–7.11	1.07–1.27	9.35–9.70
MXGC-R8G	1/4"	10.16–10.23	6.46–6.52	9.40–9.65	1.45–1.70	12.45–12.95

STEEL - COUNTERSUNK HEAD

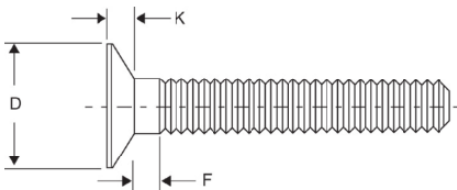

All dimensions are in millimeters. Strength values are typical.

Part No.	Lockbolt Ø	Hole Ø	Grip Range	D	K	F	Shear strength	Tensile strength
MXG90-0610S MXG90-0620S	4.8 (3/16")	5.1	2.4–15.9 7.9–31.7	8.8	2.2	4.3 9.4	775	744
MXG90-0810S MXG90-0820S	6.4 (1/4")	6.7	1.6–15.9 7.9–31.7	13.3	4.1	2.2 9.1	1366	1356



Matching Collars	Ø Ref.	A	B	C	D	E
MXGC-R6G	3/16"	7.85–7.92	4.84–4.91	6.86–7.11	1.07–1.27	9.35–9.70
MXGC-R8G	1/4"	10.16–10.23	6.46–6.52	9.40–9.65	1.45–1.70	12.45–12.95