


SDL™ LOCKBOLT PINS




Vibration-resistant SDL™ fasteners install with consistency and control. They resist loosening due to vibration and provide a high uniform clamp force. This is an excellent fastener for a wide range of structural applications. With a simple and fast installation process, the SDL™ fastener holds the joints tight, everytime. Available in steel, stainless steel, and aluminium material ranging from 3/16" to 3/8" diameters.


STEEL, ALUMINUM & STAINLESS STEEL - (3/16" AND 1/4" DIAMETER)

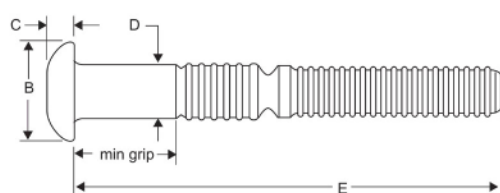

ROUND HEAD



TRUSS HEAD



COUNTERSUNK HEAD

All dimensions are in millimeters.

Part No.	Diameter Ref.	D	Round Head		Truss Head		Csk. Head	
			B	C	B	C	B	C
SDL [][]-06 []	(3/16")	4.8–4.9	9.0–10.0	2.9–3.2	10.0–11.9	2.0–2.2	8.3–9.0	1.9–2.2
SDL [][]-08 []	(1/4")	6.4–6.6	12.1–13.3	3.5–3.9	13.5–15.1	2.6–2.9	11.1–12.0	2.6–2.9

- SELECT GRIP NUMBER (SEE TABLE BELOW)
- SELECT MATERIAL: **S** = STEEL, **A** = ALUMINIUM, **U** = STAINLESS STEEL
- SELECT HEAD STYLE: **R** = ROUND; **T** = TRUSS; **C** = 90° COUNTERSUNK

Material:	Steel	Aluminium	Stainless Steel
Finish:	Zinc Plated (G)	Natural	Natural

GRIP DATA AND DIMENSIONS

Part No.	Grip range	E (Length)	
		06 (3/16")	08 (1/4")
02	1.57–4.75	34.93	38.10
04	4.75–7.92	38.10	41.30
05	6.35–9.53	39.70	42.90
06	7.92–11.10	41.30	44.50
08	11.10–14.27	44.50	47.60
10	14.27–17.45	47.62	50.80
12	17.45–20.62	50.80	53.98
14	20.62–23.80	53.98	57.15
16	23.82–26.97	57.15	60.30

Part No.	Grip range	E (Length)	
		06 (3/16")	08 (1/4")
18	26.97–30.15	60.30	63.50
20	30.16–33.34	63.50	66.70
22	33.34–36.51	66.70	69.85
24	36.51–39.69	69.85	73.02
26	39.69–42.86	73.02	76.20
28	42.86–46.06	76.20	79.40
30	46.04–49.21	79.40	82.55
32	49.21–52.39	82.55	85.73

ORDERING EXAMPLE

SDLRS-0804G = Round Head, 1/4" diameter with grip range of 4.75–7.92 mm, Steel, Zinc Plated